



HELIFLEX METAL EN POLYURETHANE

5
FLEXIBILIDADE
FLEXIBILITY


ALIMENTAR
FOOD QUALITY


ATÓXICO
NON TOXIC

3
ESMAGAMENTO
CRUSH
RESISTÊNCIA
RESISTANCE


FLEXÍVEL
FLEXIBLE


RESIST. ABRASÃO
RESISTANCE ABRASION

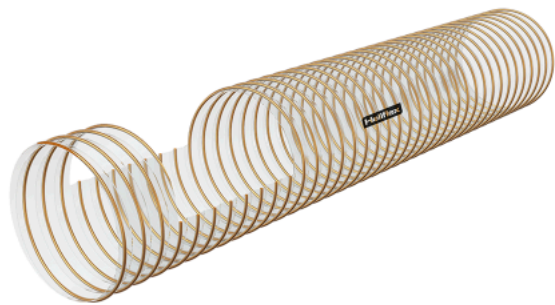

5
RESIST. ABRASÃO
RESISTANCE ABRASION


2
VÁCUO
VACUUM

+80°C
-25°C
TEMPERATURA
TEMPERATURE


4
INTERIOR LISO
SMOOTH INTERIOR


SUPER LEVE
SUPER LIGHT



intérieur (mm)	longueur (m)	couleur	extérieur (mm)	épaisseur (mm)	poids (kg/m)	vide (bar)	rayon de courbure (mm)
25 mm	025 m	92	28.4 mm	0.5 mm	0.16 kg	0.4 bar	25 mm
25 mm	030 m	92	28.4 mm	0.5 mm	0.16 kg	0.4 bar	25 mm
50 mm	010 m	92	54 mm	0.5 mm	0.33 kg	0.3 bar	50 mm
50 mm	015 m	92	54 mm	0.5 mm	0.33 kg	0.3 bar	50 mm
50 mm	030 m	92	54 mm	0.5 mm	0.33 kg	0.3 bar	50 mm
60 mm	010 m	92	64 mm	0.5 mm	0.38 kg	0.3 bar	60 mm
60 mm	015 m	92	64 mm	0.5 mm	0.38 kg	0.3 bar	60 mm
60 mm	030 m	92	64 mm	0.5 mm	0.38 kg	0.3 bar	60 mm
75 mm	015 m	92	79 mm	0.5 mm	0.44 kg	0.3 bar	75 mm
75 mm	030 m	92	79 mm	0.5 mm	0.44 kg	0.3 bar	75 mm
80 mm	010 m	92	84.2 mm	0.6 mm	0.45 kg	0.3 bar	80 mm
80 mm	015 m	92	84.2 mm	0.6 mm	0.45 kg	0.3 bar	80 mm
80 mm	030 m	92	84.2 mm	0.6 mm	0.45 kg	0.3 bar	80 mm
90 mm	010 m	92	94.2 mm	0.6 mm	0.52 kg	0.3 bar	90 mm
90 mm	020 m	92	94.2 mm	0.6 mm	0.52 kg	0.3 bar	90 mm
90 mm	030 m	92	94.2 mm	0.6 mm	0.52 kg	0.3 bar	90 mm
100 mm	010 m	92	105 mm	0.5 mm	0.7 kg	0.3 bar	100 mm
100 mm	020 m	92	105 mm	0.5 mm	0.7 kg	0.3 bar	100 mm
100 mm	030 m	92	105 mm	0.5 mm	0.7 kg	0.3 bar	100 mm
110 mm	010 m	92	115 mm	0.5 mm	0.84 kg	0.3 bar	110 mm
120 mm	010 m	92	125 mm	0.5 mm	0.91 kg	0.2 bar	120 mm
120 mm	020 m	92	125 mm	0.5 mm	0.91 kg	0.2 bar	120 mm
120 mm	030 m	92	125 mm	0.5 mm	0.91 kg	0.2 bar	120 mm
130 mm	010 m	92	135.2 mm	0.6 mm	1.04 kg	0.2 bar	130 mm
130 mm	015 m	92	135.2 mm	0.6 mm	1.04 kg	0.2 bar	130 mm
130 mm	030 m	92	135.2 mm	0.6 mm	1.04 kg	0.2 bar	130 mm
150 mm	010 m	92	155.4 mm	0.7 mm	1.08 kg	0.2 bar	150 mm
150 mm	020 m	92	155.4 mm	0.7 mm	1.08 kg	0.2 bar	150 mm
150 mm	030 m	92	155.4 mm	0.7 mm	1.08 kg	0.2 bar	150 mm
160 mm	010 m	92	165.2 mm	0.6 mm	1.15 kg	0.2 bar	160 mm
160 mm	015 m	92	165.2 mm	0.6 mm	1.15 kg	0.2 bar	160 mm
160 mm	030 m	92	165.2 mm	0.6 mm	1.15 kg	0.2 bar	160 mm
180 mm	010 m	92	185.2 mm	0.6 mm	1.2 kg	0.2 bar	180 mm
200 mm	010 m	92	205.4 mm	0.7 mm	1.4 kg	0.1 bar	200 mm
200 mm	020 m	92	205.4 mm	0.7 mm	1.4 kg	0.1 bar	200 mm
220 mm	020 m	92	226.6 mm	0.6 mm	1.8 kg	0.1 bar	220 mm
250 mm	010 m	92	256.6 mm	0.6 mm	2.1 kg	0.1 bar	250 mm
250 mm	020 m	92	256.6 mm	0.6 mm	2.1 kg	0.1 bar	250 mm
300 mm	005 m	92	306.8 mm	0.7 mm	2.58 kg	0.1 bar	300 mm
300 mm	010 m	92	306.8 mm	0.7 mm	2.58 kg	0.1 bar	300 mm